

DEFINE
YOUR TONE




PWT05MKII

UNIVERSAL 9VDC PEDALBOARD POWER SUPPLY

USER'S MANUAL
BEDIENUNGSANLEITUNG
MANUEL D'UTILISATION
MANUAL DE USUARIO

PANEL DESCRIPTION / ANSCHLÜSSE UND BEDIENELEMENTE / DESCRIPTION PANNEAU / DESCRIPCIÓN DE LOS PANELES

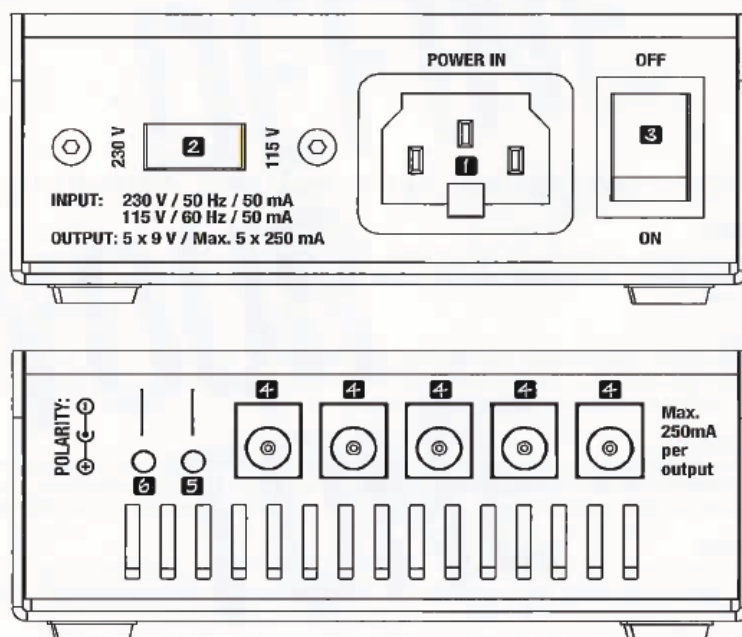

1

EN IEC MAINS SOCKET

Connect the unit to the mains.

2

EN VOLTAGE SELECTOR

Use this switch to switch between 115V and 230V depending on which country you are in. Caution: mismatching can damage the device.

3

EN MAINS SWITCH

Turn the unit on/off.

4

EN 9VDC OUTPUTS

5x isolated DC outputs, each supplying 250mA.

5

EN POWER LED

Lights up when the power is on.

6

EN OVERLOAD

Lights up when one or more outputs are overloaded or if there is a short circuit. Check your cables and disconnect devices until the LED goes off again.

FEATURES / FEATURES / CARACTÉRISTIQUES / CARACTERÍSTICAS

EN This power supply is capable of powering far more than five normal effects units (which normally have a power consumption of approx. 20 mA).

- Compact, rugged housing
- IEC socket
- Input voltage selection switch
- Power switch.
- 5 isolated outputs, isolated means that you will not encounter any annoying ground loop humming

INCLUDED CABLES / MITGELIEFERTE KABEL / Câbles livrés / CABLES SUMNISTRADOS

EN The PWT05 comes with a wide selection of connection cables.

- 5x Short DC cables (approx. 30cm long)
- 5x Long DC cables (approx. 60cm long)
- 1x Daisy chain cable (connect up to 5 devices to one output of the PWT05)
- 1 x special Y-cable for doubling the intensity of electric current, identified with a black connector (please use this cable to connect the two outputs for max. 500 mA)
- 1 x special Y-cable for doubling the voltage of electric current, identified with a white connector (please use this cable to connect the two outputs to double the voltage from 9 V to 18 V)

SPEZIFIKATIONEN / SPECIFICATIONS

EN

Product type:	power supply
Type:	multiple power supply
Mains connector:	IEC mains cord
Input voltage:	230 V ~ 50 Hz, 115 V ~ 60 Hz
Outputs:	5
Output connectors:	2.1 x 5.5 mm
Output voltage:	9 V
Max. output current:	each output 250 mA
Isolated outputs:	yes
Polarity:	center negative
Cord length:	25 - 50 cm

Display:	Power, Overload
Controls:	mains voltage selector, Power
Dimensions [W x D x H]:	105 x 140 x 45 mm
Weight:	0.99 kg

DEFINE
YOUR TONE



WWW.PALMER-GERMANY.COM

PALMER® IS A BRAND OF THE ADAM HALL GROUP

ADAM HALL GMBH · DAWLERSTRASSE 9
61267 NEU-ANSPACH · GERMANY
FON: (+49) 6081 / 94 19 - 0 · FAX: (+49) 6081 / 94 19 - 1000
WWW.ADAMHALL.COM
REV:02

